



## Programmable POS Keyboard PKB-044/078 Series



**TYSSO**®

Insist on the Best



**PKB-044**



**PKB-078**


### FEATURES

- Membrane key switches with tactile feeling
- 10 million strokes operating life cycles
- True keyboard wedge function: Key Code or ASCII Code
- Windows software programming without TSR program
- Magnetic stripe card reader available with various track combinations
- 6 positions key lock function
- Each key can be programmed up to 200 codes
- Up to 16 layers programming capability
- Non-volatile memory 10KB

## SPECIFICATIONS

Models	PKB-044	PKB-078
	<i>Physical</i>	
<b>Material</b>	ABS	
<b>Interface</b>	PS/2	
<b>Key Switch</b>	Membrane	Membrane or Mechanical (Option)
<b>Dimension</b>	234L x 144W x 45H mm	290L x 175W x 45H mm
<b>Cable Length</b>	2800mm	
<b>Weight</b>	0.68Kg	1.12Kg
<b>Color</b>	Black or white (Option)	
<b>Travel Distance</b>	4±0.5mm	
<b>Operating Life Cycles</b>	10 million strokes	
	<i>Electrical</i>	
<b>Power Supply</b>	+5VDC±10%	
<b>Interface</b>	PS/2	
<b>Current Input</b>	≤ 100mA	
	<i>Magstripe Card Reader (Option)</i>	
<b>Card Density</b>	Track 1: 210BPI with max. 76 characters Track 2: 75BPI with max. 37 characters Track 3: 210BPI with max. 107 characters	
<b>Magnetic Tracks</b>	Track 1 or Track 2 or Track 3 or Dual Track (Track 1&2 or Track 2&3) or Three Track (Track 1&2&3)	
<b>Card Swipe Speed</b>	10 to 100 cm/sec.	
<b>Swipe Cycles</b>	300,000 or 1,000,000 (Option)	
	<i>Others</i>	
<b>OS</b>	Windows 98, ME, 2000, XP, Vista 32	
<b>6 Position Key Lock &amp; Keys</b>	Option	Standard
<b>Operating Temperature</b>	0°C ~ +40°C	
<b>Storage Temperature</b>	-20°C ~ +55°C	
<b>Operating Humidity</b>	40%~90%	

## DIMENSIONS

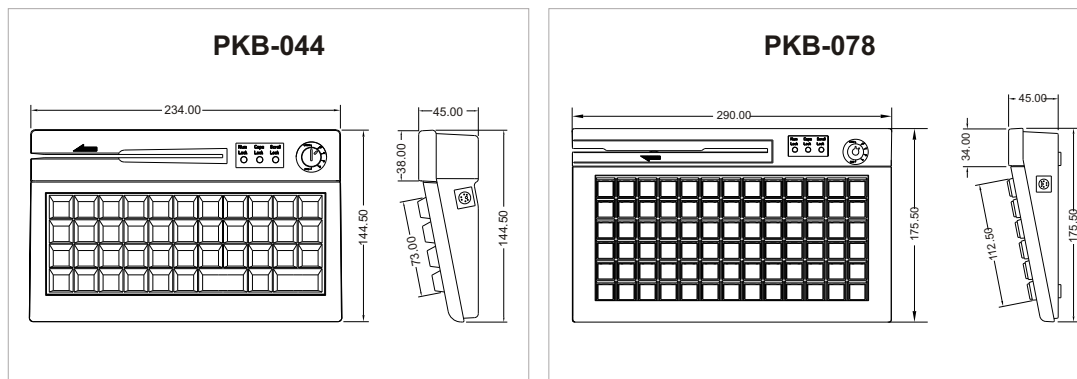

**Manufacturer**  
**FAMETECH INC.**  
 2F, No. 165, Sec. 2, Ta-Tung Rd.,  
 Hsi-Chih 221, Taipei Hsien, Taiwan  
 Tel : 886-2-8692-6300  
 Fax: 886-2-8692-6301  
 E-Mail: tyssso@ms6.hinet.net  
 URL: <http://www.fametech.com.tw>

Distributor